

SERIE 5 PUR SX INDUSTRIE

Heavy weight and flexible polyurethane ducting- Copper-coated spring wire.

Gaine lourde et flexible en polyuréthane, renforcée d'une spirale acier de surface cuivrée.




Structure: Flexible ducting made out of polyurethane wall, reinforced with copper-coated spring steel wire for grounding. Extremely smooth bore inside.

Applications: Suction and discharging of abrasive and granular materials, suitable for applications in industry.



Structure : Gaine flexible faite d'une paroi polyuréthane souple; renforcée d'une spirale en acier ressort cuivrée pour une mise à la terre. Très lisse intérieur.

Applications : Aspiration et transport de matières abrasives et de granulés dans l'industrie.

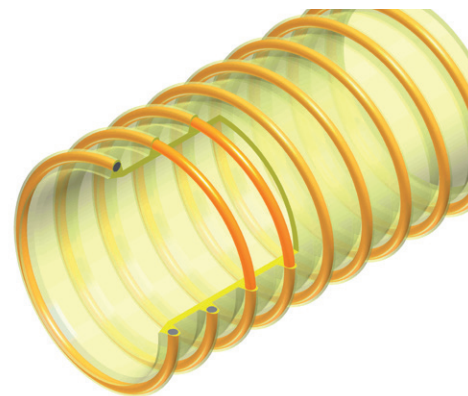

Gaine PU

						
int mm	kg/m	mm	mm	bar	bar	m
40	0,540	1,40	60	2,30	0,70	10
50	0,670	1,40	75	1,90	0,60	10
60	0,800	1,40	90	1,80	0,55	10
70	0,920	1,40	105	1,60	0,50	10
75	0,990	1,40	113	1,40	0,50	10
80	1,050	1,40	120	1,20	0,45	10
90	1,180	1,40	135	1,10	0,40	10
100	1,520	1,40	150	1,10	0,40	10
110	1,670	1,40	165	1,00	0,35	10
120	1,820	1,40	180	0,90	0,30	10
125	1,890	1,40	188	0,80	0,25	10
140	2,110	1,40	210	0,70	0,20	10
150	2,430	1,40	225	0,70	0,20	10
160	2,590	1,40	240	0,60	0,20	10
175	2,820	1,40	263	0,55	0,15	10
200	3,370	1,40	300	0,50	0,15	10
225	3,780	1,40	338	0,40	0,10	10
250	4,190	1,40	375	0,30	0,10	10
300	5,010	1,40	450	0,30	0,10	10
350	5,330	1,40	525	0,25	0,09	10




Temperature | Température :

- 40 / + 100 °C
- 40 / + 212 °F


Properties | Caractéristiques :

Excellent abrasion resistance. Very smooth bore. Embout vissable sur demande.

Excellente résistance à l'abrasion. Très lisse intérieur. Screw-on end piece on request.



eurs :



Screw-on cap on request |
Embout vissable sur demande :

