

## FLEXACIER STD SPH

Phthalate-free - standard duty, steel spiral reinforced suction and delivery hose for high quality liquids, foodstuffs

Tuyau flexible à usage standard, de qualité alimentaire sans Phtalate, renforcé d'une spirale acier pour le pompage et le refoulement de liquides




**Structure:** Flexible hose made out of soft phthalate-free food grade PVC wall in accordance with the modified EU regulation 10/2011 (simulant A, B, C, D1) and CE 1935/2004, reinforced with galvanized steel helix.








**Applications:** Designed for standard duty suction and delivery of high quality liquids and foodstuffs, including alcohol up to 50° in industry, agriculture, irrigation, water supply.

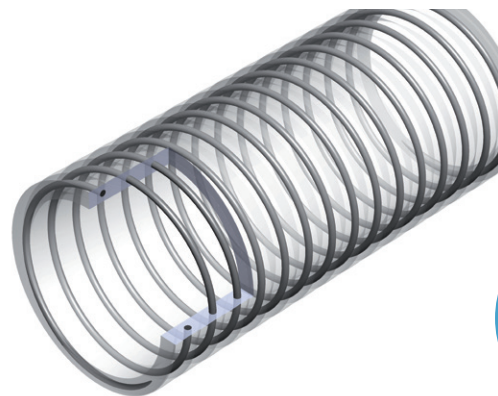

**Structure :** Tuyau flexible fait d'une paroi PVC souple sans phtalate de qualité alimentaire selon la norme UE 10/2011 modifiée (simulant A, B, C, D1) et CE 1935/2004, renforcé d'une spirale en acier galvanisé.

**Applications :** Conçu pour une utilisation légère d'aspiration et de refoulement de liquides alimentaires de forte valeur ajoutée, incluant l'alcool à 50°, compatibles avec le PVC.



						
int mm	ext mm	kg/m	mm	bar	bar	m
38	48	0,800	130	6,0	0,90	30
40	51	0,900	160	6,0	0,90	30
45	57	1,140	170	6,0	0,90	30
51	63	1,260	180	5,0	0,90	30
55	67	1,520	200	5,5	0,85	30
60	72	1,660	230	4,0	0,85	30
63	75	1,740	250	4,0	0,85	30
70	83	2,150	280	4,0	0,85	30
76	89	2,300	330	4,0	0,85	30
80	93	2,450	350	3,5	0,85	30
90	103	2,750	380	3,0	0,85	30
102	116	3,340	400	3,0	0,85	30
105	121	3,700	420	3,0	0,80	30
110	126	3,800	430	2,5	0,80	20
120	136	4,200	450	2,0	0,80	20
127	140	5,000	450	2,0	0,80	20
152	167	6,000	500	2,0	0,80	20



Printing | Marquage :

FLEXACIER STD SPH   
 PHTHALATE FREE CE 10/2011 n°lot

Temperature | Température :

- 5 / + 65 °C  
 + 23 / + 149 °F

Properties | Caractéristiques :

Smooth inside, smooth outside.  
 Lisse intérieur, lisse extérieur.

Colors | Couleurs :

