

## CRISTALSPIR SAF SPH

Phthalate-free low temperature medium duty flexible hose for suction and delivery of liquids & foodstuffs - fully transparent

*Tuyau flexible à basse température de qualité alimentaire sans phtalate pour le pompage et le refoulement de liquide pour un usage soutenu*




**Structure:** Flexible hose made out of phthalate-free, very soft, low temperature resistant, food-grade PVC wall in accordance with the modified EU regulation 10/2011 (simulant A, B, C, D1) and CE 1935/2004, reinforced with shock-resistant transparent PVC spiral.








**Applications:** Designed for low temperature medium duty suction and delivery of high quality liquids and foodstuffs, fruit juice, wine, beer and alcohol up to 50% compatible with PVC - fully transparent for continuous monitoring.

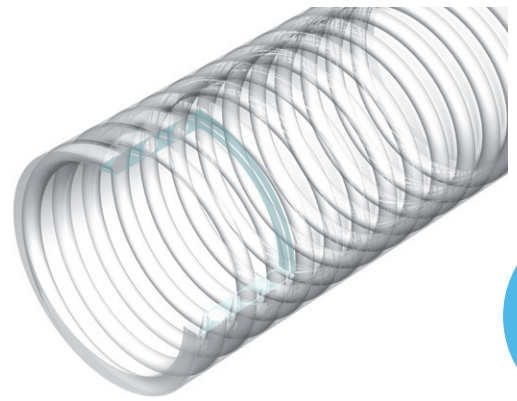

**Structure :** Tuyau flexible fait d'une paroi PVC très souple sans Phtalate de qualité alimentaire selon la norme UE 10/2011 modifiée (simulant A, B, C, D1) et CE 1935/2004, renforcé d'une spirale en PVC rigide de qualité antichoc.

**Applications :** Conçu pour une utilisation soutenue à basse température d'aspiration et de refoulement de liquides alimentaires de forte valeur ajoutée, incluant l'alcool à 50%, compatibles avec le PVC.




						
int mm	ext mm	kg/m	mm	bar	bar	m
25	27,2	0,390	160	9	0,90	25
32	35,0	0,520	205	9	0,90	25
38	41,2	0,630	243	9	0,90	25
35	43,0	0,595	225	9	0,90	25
40	48,6	0,760	234	9	0,90	25
51	60,0	1,050	243	8	0,90	25
55	64,2	1,125	252	8	0,85	25
60	69,4	1,20	270	8	0,85	25
63	72,3	1,30	292	7	0,85	25
70	80,2	1,650	342	7	0,85	25
80	92,0	1,875	360	7	0,85	25
90	103,0	2,200	405	5	0,85	25
102	114,0	2,815	450	4	0,85	25
110	124,4	3,125	477	4	0,80	25
120	136,0	3,585	540	3	0,80	25
152	168,0	5,125	675	2,5	0,80	25



**Phthalate Free!**

Printing | Marquage :

CRISTALSPIR SAF SPH   
 PHTHALATE FREE  
 CE 10/2011 n°lot

Temperature | Température :

- 25 / + 55 °C  
 - 13 / + 131 °F

Properties | Caractéristiques :

Smooth inside, smooth outside.  
*Lisse intérieur, lisse extérieur.*

Colors | Couleurs :

